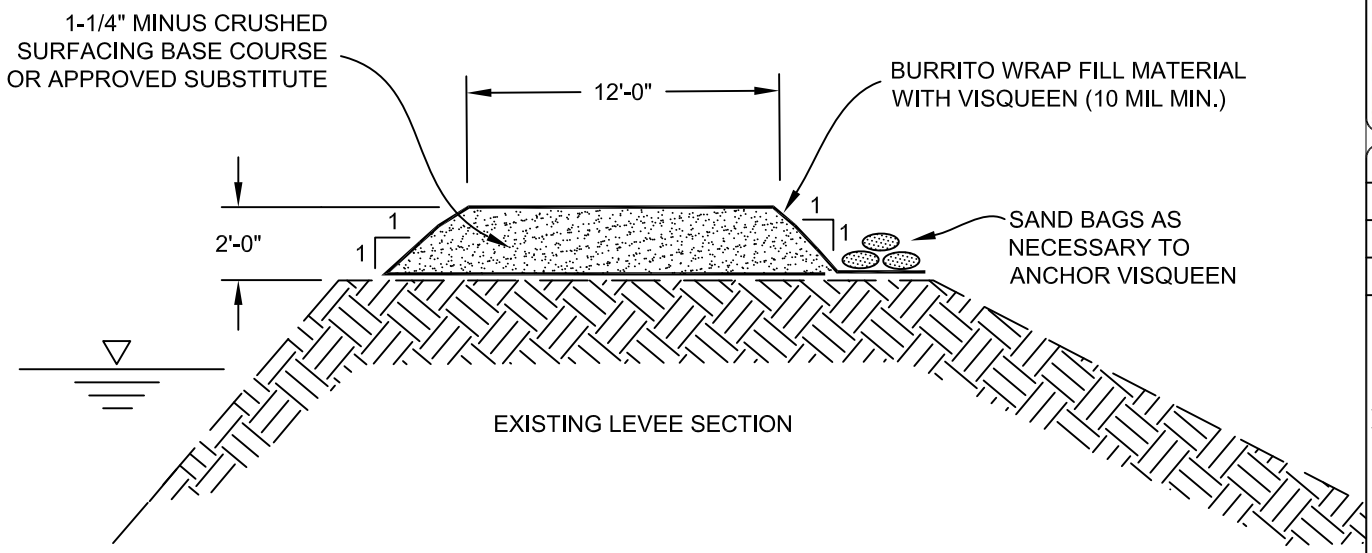

NOTES:

1) FILL MATERIAL SHALL CONSIST OF CRUSHED SURFACING BASE COURSE PER WSDOT SPEC 9-03.9(3) OR APPROVED SUBSTITUTE.
2) VISQUEEN SHALL BE PLACED ON THE GROUND PRIOR TO FILL PLACEMENT AND THEN WRAPPED OVER THE TOP OF THE FILL ON THE RIVERWARD SIDE AND ANCHORED WITH SAND BAGS OR ADDITIONAL FILL ON THE LANDWARD SIDE.
3) WHEN CONSTRUCTED ACCORDINGLY TO THE DIMENSIONS SHOWN, THE FILL PLACEMENT WILL REQUIRE APPROXIMATELY ONE CUBIC YARD OF MATERIAL PER LINEAR FOOT OF INSTALLATION.

CDID #1
CONSOLIDATED DIKING IMPROVEMENT DISTRICT NO. 1

REV	ISSUE	DWG	DES	CHK	APP
10/2020	new standard	TC	ANB	ANB	ANB

TEMPORARY LEVEE RAISE
STANDARD INSTALLATION DETAIL

DATE: OCT 2020
DESIGN: ANB
DRAWN: TC

DRAWING NO.
C-13
1 of 1